

SCHMEISER®
S-TINE SEEDER
2nd GENERATION – SERIES '98

ASSEMBLY & PARTS
MANUAL



T.G. SCHMEISER CO., INC.
P.O. BOX 1112 FRESNO, CA 93714-1112
(559) 268 - 8128 FAX (559) 268 – 3279

VERSION 2.2
MAY 2007

©COPYRIGHT 2007 T.G.SCHMEISER CO., INC.

INTRODUCTION

Your Schmeiser S-Tine Seeder is designed to give you many years of dependable service. This manual has been prepared to instruct you in the safe and efficient operation of this machine. Read and study it thoroughly. Follow all instructions carefully.

Should your S-Tine Seeder require replacement parts, go to your Schmeiser dealer. Always order genuine Schmeiser replacement parts.

It is important that you complete and send in your Warranty Card because it is not valid unless it is on file at Schmeiser. If you need information not contained in this manual, contact your Schmeiser dealer.

Space has been provided below for you to record the model number and serial number of your seeder. Be sure to bring this information with you to your dealer when ordering parts or attachments for your seeder.

Thank you for buying a Schmeiser S-Tine Seeder.

SERIAL NUMBER _____

MODEL NUMBER _____

DATE PURCHASED _____

DEALER NAME _____

TABLE OF CONTENTS

Introduction.....	2
Table of Contents.....	3
Safety Rules.....	4
Seed Cup.....	5
Seed Rate Calibration.....	6
Seed Rate Chart.....	7
Planting Depth Adjustments.....	8
Sprocket and Chain Assemblies.....	9
S-Tine Seeder Box Assembly.....	10
Feeder Cup and Drive Components.....	12
Feeder Cup Assembly.....	14
Main Frame and Wheel Leg Assemblies.....	16
Jack Shaft, Sprocket, Idler and Bearing Assemblies.....	18
S-Tine and Hose Assemblies.....	20
Limited Warranty.....	22
Maintenance and Repair Record.....	23
Notes.....	24

SAFETY RULES

The safe operation of any machinery is a big concern to farmers and manufacturers. We have designed our S-Tine Seeder with many built-in safety features. However, no one should operate this machine before carefully reading this Owner's Manual.


1. Never permit anyone to ride on or walk beside the S-Tine Seeder when moving.
2. Never permit anyone to ride on tractor when S-Tine Seeder is being moved.
3. Never allow anyone to be near the S-Tine Seeder when performing operating functions with seeder or tractor.
4. Never load S-Tine Seeder without being hooked-up to tractor.
5. Extra care should be taken when transporting with seed in the box.
6. Never back S-Tine Seeder up when s-tines are in ground.
7. Reduce speed of tractor when transporting over uneven or rough terrain. Avoid all chuck holes and washboard areas in road.
8. Reduce speed of tractor when transporting over hills or steep slopes.
9. Always set S-Tine Seeder in field position before lubrication.
10. Do **NOT** lubricate, adjust or repair the S-Tine Seeder while it is in operation.
11. When in transport, use accessory lights and devices for adequate warning to operators of other vehicles, and use safety chains. Comply with all Federal, State and local laws when traveling on public roads.
12. Use "Slow Moving Vehicle" emblem for warning vehicles approaching from rear.
13. Do **NOT** permit smoking, sparks, or an open flame where combustible lubricants, or liquids are being used.
14. When using treated grain, avoid direct contact with the seed.
15. When using compressed air to clean S-Tine Seeder, wear safety glasses.
16. When transporting, remember the S-Tine Seeder may be wider than your tractor and extreme care must be taken to allow for safe clearance.

SEED CUP

IMPORTANT: Be sure to adjust seed cup lever position prior to loading seed in hopper.

WARNING: Closing seed lever with seed in cup may damage or break lever.

It is important to select the correct lever position. The incorrect position may cause
a) seed damage and/or b) cup damage.

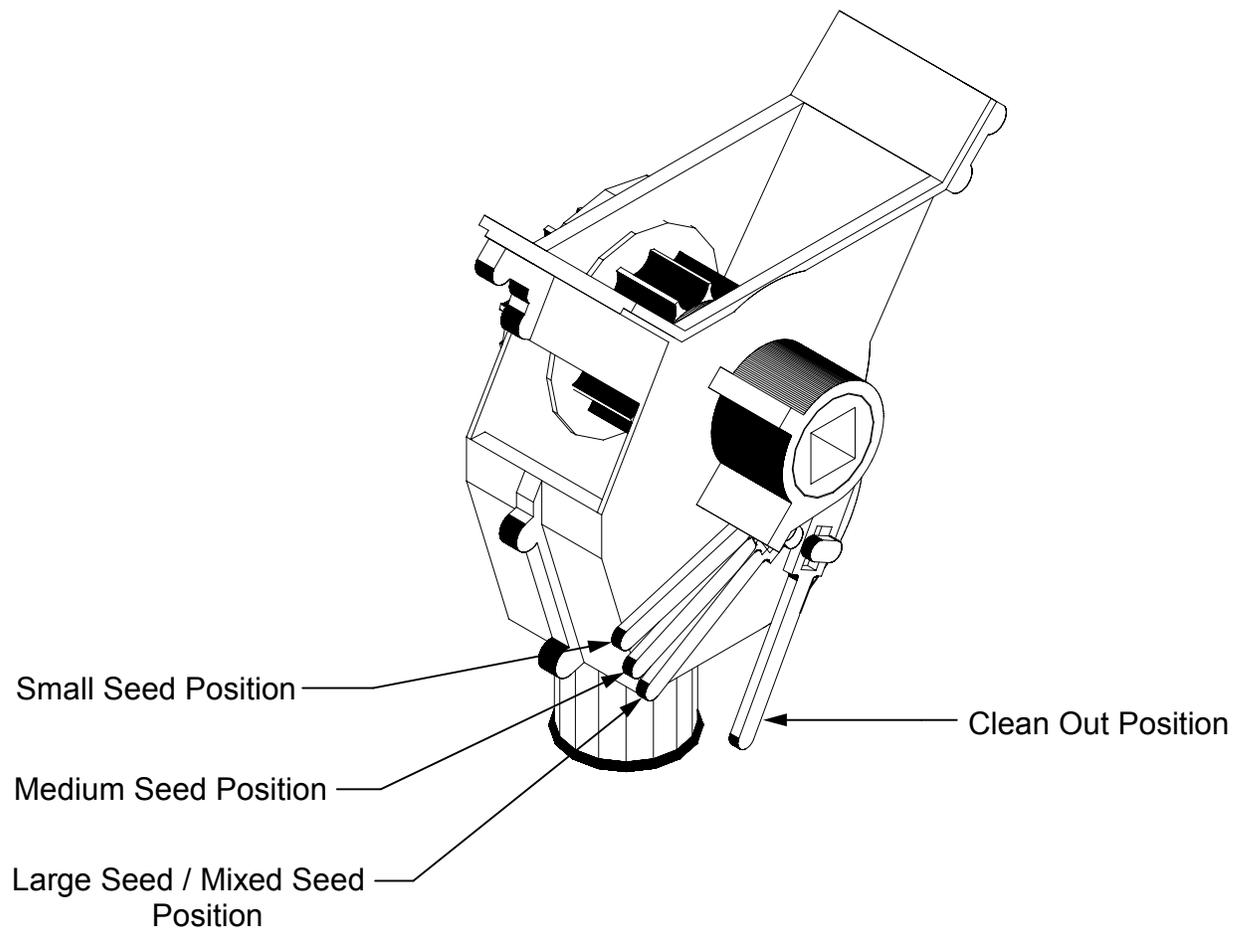

SCHMEISER S-TINE SEEDER

SEED RATE CALIBRATION

Note: Seeding rates will vary greatly with variations in sizes of seeds. Although the seeding rates listed in this manual are based on an average seed size, we recommend that you test and adjust your S-Tine Seeder using the procedures listed below.

- 1) There are many factors, which will affect seeding rates: Seed treatment, weight of seed, size of seed, surface condition of seed, tire configuration and pressure, and tire slippage. Minor adjustments will probably be needed to compensate for the above factors.
- 2) The rates listed in the seed charts are based in the gauge wheel drive having 20.5 x 8.0 x 10 tire with the recommended tire inflation.
- 3) The large difference in seed size and treatment can cause a wide variation in actual seeding rates. The rate charts are based on average size seed. This may differ from the seed you are using. Use the seed rate charts as a guide only. Set the pounds per planted acre desired at the indicator number and complete the following procedure to calibrate the rate for specific seed.
 - a. Place several pounds of seed over three feeder cups at the outboard end of the S-Tine Seeder.
 - b. Pull the seed tubes out of these three drops.
 - c. Raise the drive wheel off the ground using a jack.
 - d. Rotate the tire to see that the drive system is working properly and that the feed cups are free from foreign matter.
 - e. Place a container under the three seed tubes to gather seed as it is metered.
 - f. On 4 ft. wide models rotate the tire 48 times to obtain 1,000 square feet. On 5 ft. wide models rotate the tire 38 times to obtain 1,000 square feet. On 6 ft. models rotate the tire 32 times to obtain 1,000 square feet. Be sure to check the three feeder cups to make sure each cup has plenty of seed coming into it.
 - g. Weigh the seed, which has been metered. Divide by three. This will give you the ounces/pounds metered by each feeder cup. Multiply by the number of cups on your S-Tine Seeder to arrive at the total pounds per 1,000 square feet. Now multiply by 43.56 to arrive at the total pounds per planted acre. If this figure is different than desired, set your feed cup adjustment lever accordingly.
- 4) You may want to repeat the calibration procedure if the results of your calibration vary greatly from the suggested settings contained in this manual.

REMEMBER: Tire size and field conditions will also affect seeding rates. Be certain that your S-Tine Seeder tires are 20.5 x 8.0 x 10 and that they have the proper inflation. When seeding, check the amount of seed you are using by noting area seeded, amount of seed added to box, and level of seed in seeder box. If you suspect that you are seeding more or less seed than desired, and you have accurately calibrated the S-Tine Seeder to your seed, you may need to adjust the seeding rate slightly to compensate for your field conditions.

SEEDING RATES FOR SCHMEISER S-TINE SEEDER 2ND GENERATION – SERIES '98



Rates in Pounds per Planted Acre

August 1, 2001	Sprocket Combination:		13/33 x 12/33							
Seed	Seed Rate Indicator Setting Number									
	10	20	30	40	50	60	70	80	90	100
POUNDS PER ACRE										
Barley	12	23	42	56	69	91	106	118	132	147
Bio Max Cover Crop*	14	28	56	75	93	128	149	172	194	216
Clover - Perennial	17	35	57	77	96	119	139	152	171	190
Cover Crop Mix #1*	16	31	64	86	106	139	162	182	205	227
Cover Crop Mix #2*	22	44	69	92	115	145	169	182	195	209
Cover Crop Low Profile*	18	37	64	85	106	127	147	171	193	213
Cover Mate Mix*	7	14	21	27	34	39	46	52	57	64
Crimson/Berseem	18	36	53	72	89	114	132	150	168	186
Insectary Mix*	16	33	55	74	91	107	126	152	159	177
Pearl Millet	20	39	65	86	107	148	173	218	246	273
Rye Grass - Annual	8	14	29	39	48	63	74	85	95	106
Sorghum Sudan	14	28	54	73	90	125	152	178	200	222
Sudan Bravo Brand	15	30	52	69	86	109	128	145	164	181
Vetch - Common	18	38	73	96	120	145	169	182	205	228
Winter Forage #1*	10	21	39	52	65	83	96	116	130	145

CAUTION: THESE RATES ARE APPROXIMATE ONLY. PLEASE VERIFY OUTPUT PRIOR TO FIELD USE.


*** Germain's Seed**

THIS CHART APPLIES TO S-TINE SEEDERS MANUFACTURED AFTER JANUARY 2001

NOTE: INSURE THAT SQUARE SEED CUP SHAFT IS WELL LUBRICATED WHERE SHAFT GOES THROUGH CUP DRIVE BEARING (SEE Page 9.2)

PLANTING DEPTH ADJUSTMENT

Your Schmeiser S-Tine Seeder is designed to run level to the ground when in planting position. Minor adjustments may be required to achieve the desired seed placement. In order to adjust your gauge wheel/drive wheel, loosen the two set screws located on the adjusting crank housing. Rotate crank to achieve desired planting depth. After adjusting the gauge wheel/drive wheel, be certain to tighten up both set screws.

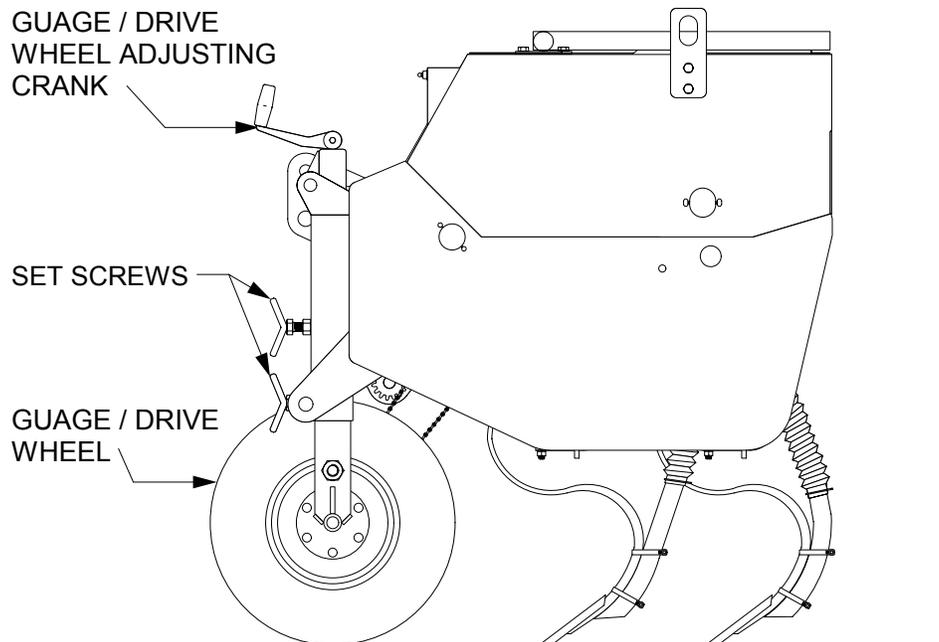

SPROCKET AND CHAIN ASSEMBLIES


DRIVE CHAIN

33T SPROCKET

15T IDLER SPROCKETS

#40 CHAIN

13T SPROCKET

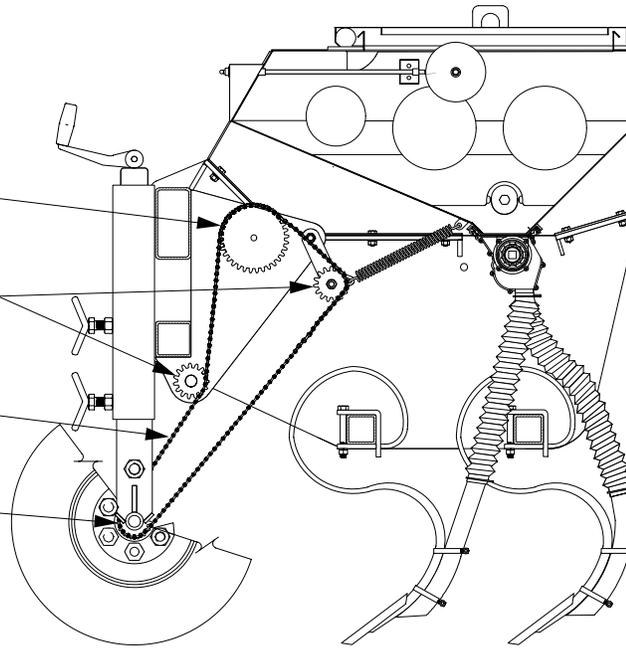

END CHAIN


#40 CHAIN

12T SPROCKET

15T IDLER SPROCKET

19T SPROCKET


33T SPROCKET

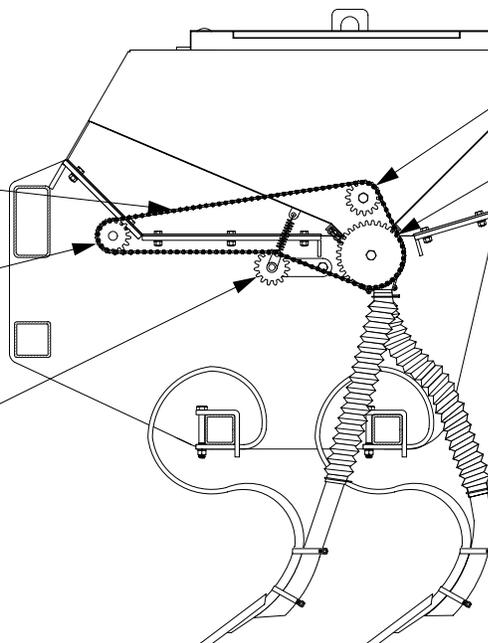

S-TINE SEEDER BOX ASSEMBLY

<u>Ref. No.</u>	<u>Old Part No.</u>	<u>New Part No.</u>	<u>Description</u>
1.	VD4-C	VDS-48C000	4' Vineyard Drill Lid Weldment
	VD5-C	VDS-60C000	5' Vineyard Drill Lid Weldment
	VD6-C	VDS-72C000	6' Vineyard Drill Lid Weldment
2.	-----	FWASHER-05	Washer, Flat 5/16"
3.	-----	WWASHER-05	Washer, Wave Spring 5/16"
4.	-----	NYNUT-05NC	Nut, Hex Nylock 5/16" - 18
5.	VD-C-07	VDS-00C007	Lid Latch-Handle
6.	817-033D	817-033D	Lid Latch Grip
7.	VD-M	VDS-00M000	Lid Hinge Weldment
8.	VD-C-08	VDS-00C008	Lid Latch - Lower Arm
9.	-----	CSNC505016	Bolt, Hex Head 5/16" - 18 x 1" Long Gr 5 Plated
10.	VD-C-12	VDS-00C012	Lid Latch - Lower Latch Bushing
11.	VD-C-09	VDS-00C009	Lid Latch - Upper Arm
13.	VD-L-01	VDS-00L000	Float Indicator Assembly
14.	VD-L-04	VDS-00L004	Float Indicator - Coupling
15.	-----	CSNC506016	Bolt, Hex Head 3/8" - 16 x 1" Long Gr 5 Plated
16.	VD-B-10	VDS-00B010	Sprocket Cover Plate
17.	VD4-B	VDS-48B000	4' Seedbox
	VD5-B	VDS-60B000	5' Seedbox
	VD6-B	VDS-72B000	6' Seedbox
18.	-----	LWASHER#10S	Washer, Internal Star #10 Plated
19.	-----	HXNUT#10NC	Nut, Hex #10-24 Plated
20.	VD-C-10	VDS-00C010	Rear Lid Latch Hook
21.	-----	CSNC#10012R	Screw, Round Head #10-24 x 3/4" Long Plated
22.	-----	HXNUT-05NC	Nut, Hex 5/16" - 18 Gr 2 Plated
23.	-----	LWASHER-05	Washer, Lock Spring 5/16" Plated
24.	-----	FWASHER-05	Washer, Flat 5/16" Plated
25.	-----	HXNUT208NC	Nut, Hex 1/2" - 13 Gr 2 Plated
26.	-----	LWASHER-08	Washer, Lock Spring 1/2" Plated
27.	-----	LWASHER-06	Washer, Lock Spring 3/8" Plated
28.	-----	HXNUT506NC	Nut, Hex 3/8" - 16" Gr 5
29.	VD-B-09	VDS-00B009	Vineyard Drill Lift Hooks
30.	-----	CSNC508016	Bolt, Hex Head 1/2" - 13 x 1" Long Gr 5
31.	-----	GBR-12FP03	3/4" Flangette Plates
32.	-----	GBR-12BI02	Bearing 3/4" Bore with Collar
33.	-----	CSNC504024	Bolt, Hex Head 1/4" - 20 x 1-1/2" Long Gr 5
34.	202-002H	202-002H	Sprocket, Speed Change 19T
35.	-----	HXNUTJ04NC	Hex Jam Nut 1/4" - 20 Plated
36.	-----	CBNC505012	Bolt, Carriage 5/16" x 3/4" Long Gr. 5
37.	VD4-G-09	VDS-48G200	4' Agitator Weldment
	VD5-G-09	VDS-60G200	5' Agitator Weldment
	VD6-G-09	VDS-72G200	6' Agitator Weldment
38.	-----	BALL-64OD	Float Indicator - Float
39.	VD-L-03	VDS-00L100	Float Indicator - Shaft Bracket - Weldment
40.	-----	GMB-CHFLIN	Float Indicator - Chain 10 3/4" Long
41.	-----	SHOOK-16	S - Hook, 1"
42.	-----	LCOLLAR-05	Lock Collar, 5/16"
43.	-----	FWASHER-06	3/8" Flat Washer
44.	-----	CSNC505024	Bolt, Hex Head 5/16" x 1 1/2"


VINEYARD DRILL / S-TINE SEEDER BOX ASSEMBLY

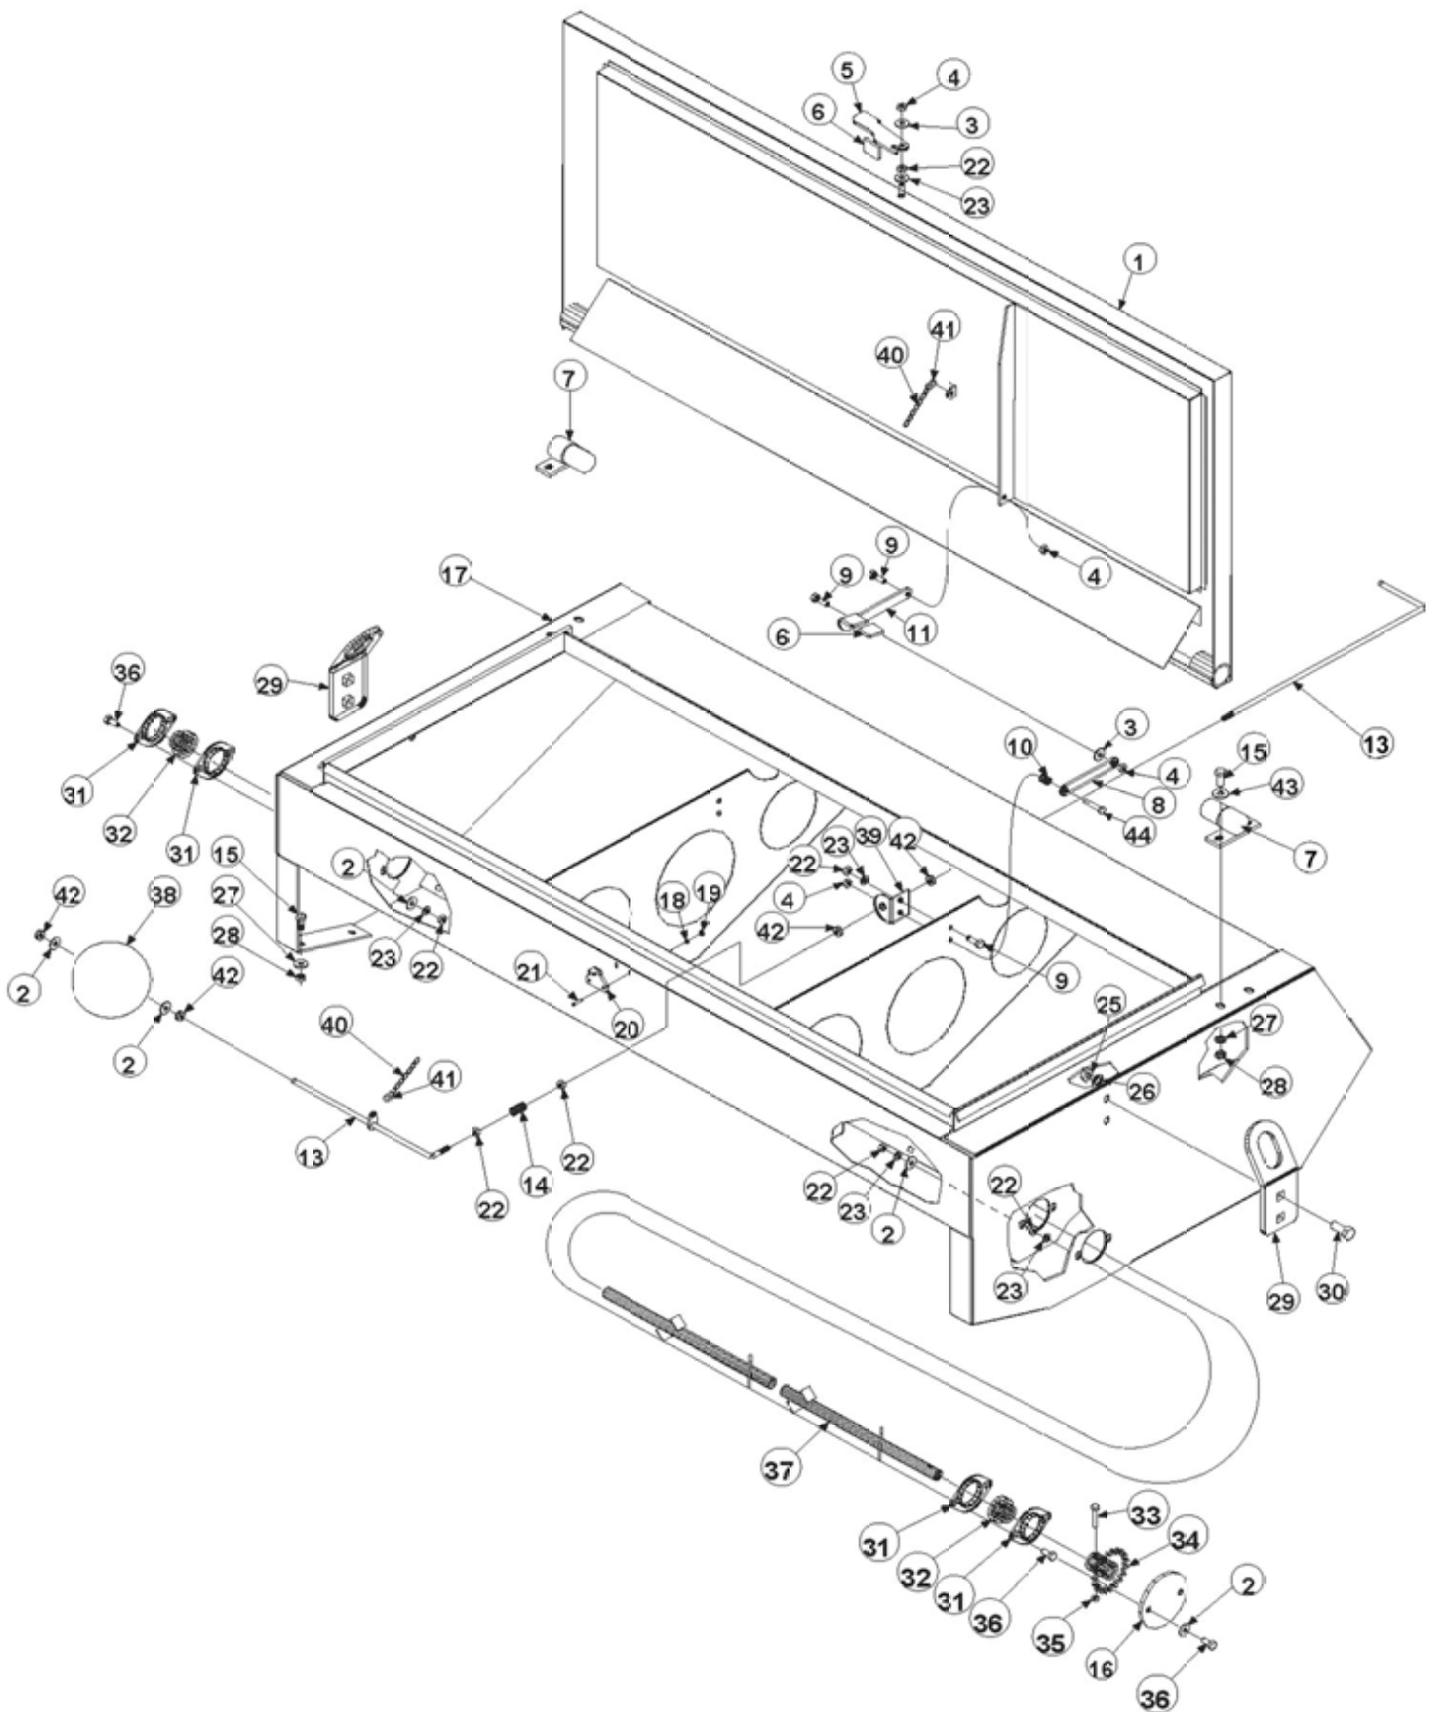

FEEDER CUP AND DRIVE COMPONENTS

<u>Ref No.</u>	<u>Old Part No.</u>	<u>New Part No.</u>	<u>Description</u>
1.	VD-B	VDS-48B000	4' Box Weldment
		VDS-60B000	5' Box Weldment
		VDS-72B000	6' Box Weldment
2.	VD-K-01	VDS-48K001	4' Cup Tray
		VDS-60K001	5' Cup Tray
		VDS-72K001	6' Cup Tray
3.	VD-K-03	VDS-00K003	Pivot Handle Adjustment Mount
4.	VD-K-02	VDS-00K100	Seed Rate Adjustment Handle
5.	109-025H	109-025H	Adjustment Lock Plate
6.	VD-K-04	VDS-00K004	Gauge Mounting Plate
8.	VD-K-07	VDS-SRINDP	Seed Rate Indicator Plate
9.	-----	CSNC#10008R	Screw, Round Head #10 x 1/2"
10.	-----	FWASHER#10	Washer, Flat #10
11.	-----	LWASHER#10S	Washer, Internal Star #10
12.	-----	HXNUT#10NC	Nut, Hex #10
16.	-----	CSNC506016	Bolt, Hex Head 3/8" - 16 x 3/4" Long
17.	-----	LWASHER-06	Washer, Lock 3/8" Plated
18.	-----	FWASHER-06	Washer, Flat 3/8" Plated
19.	109-069D	109-069D	Adjustment Handle Pivot Bushing
20.	-----	GPN-03X32C	Pin, Cotter 3/16" x 1-1/4" Long Plated
21.	308-015D	308-015D	Seed Adjustment Bearing Ring Pivot
22.	-----	FWASHER-05	Washer, Flat 5/16" USS Plated
23.	-----	NYNUT-05NC	Nut, Nylon Self Locking Hex 5/16" - 18
24.	-----	HXNUT-04NC	Nut, Hex 1/4" - 20
25.	-----	CBNC504012	Bolt, Hex Carriage 1/4" - 20 x 3/4" Long
26.	-----	WGNUT-08NC	Nut, Wing 1/2" - 13 Plated
27.	-----	FWASHER-10	Washer, Flat 5/8" Plated
28.	-----	FWASHER-08	Washer, Flat 1/2"
29.	-----	CBNC508020	Bolt, Hex Carriage 1/2" x 1-1/4"

FEEDER CUP AND DRIVE COMPONENTS

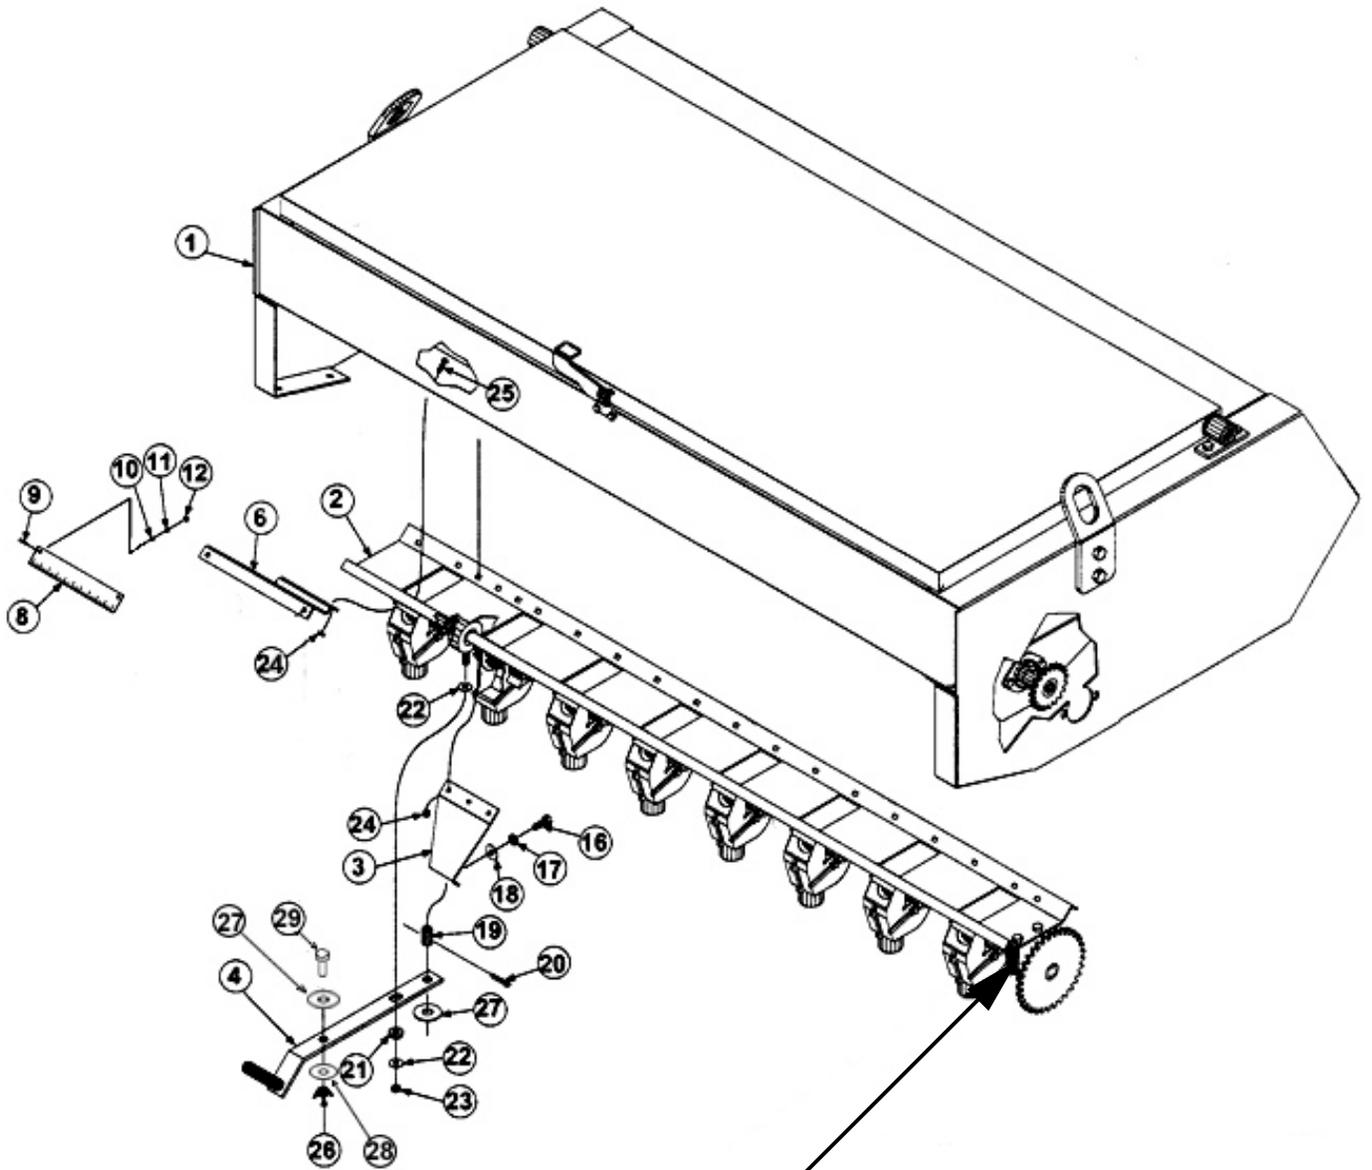


INSURE THAT SQUARE SEED CUP
SHAFT IS LUBRICATED WHERE SHAFT
GOES THROUGH CUP DRIVE BEARING.

FEEDER CUP ASSEMBLY

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
1.	VD4-K-01	VDS-48K001 4' Seed Cup Tray
	VD5-K-01	VDS-60K001 5' Seed Cup Tray
	VD6-K-01	VDS-72K001 6' Seed Cup Tray
2.	-----	CBNC504012 Bolt, Carriage 1/4" - 20 x 3/4" Long
3.	182-022D	890-350C Feeder Cup Shaft Locking Collar
4.	801-035C	801-035C Screw, Set Knurled Point 5/16" - 18 x 3/8" Long
5.	-----	LWASHER-04 Washer, Lock 1/4"
6.	803-006C	HXNUT-04NC Nut, Hex 1/4" - 20 Gr.5 Plated
7.	VD-K-07	118-438D Spacer Tube 3-9/16" Long
8.	308-004S	308-004S Sprocket Shaft Adjustment Bearing Assembly
9.	890-190C	890-190C Powder Metal Sprocket
10.	817-075C	817-075C Seed Cup Assembly
11.	817-071C	817-071C Seed Cup Adjustment Handle
12.	817-074C	817-074C Cup Sleeve
13.	804-031C	804-031C Washer, Retaining
14.	800-004C	800-004C Ring, Snap External 1-3/16"
15.	800-107C	800-107C Ring, Snap Internal 2.165
16.	822-103C	822-103C Bearing, 30mm B x 55mm OD
17.	118-336D	118-336D Cup Drive Bearing Housing
18.	VD-K-07	VDS-00K007 Cup Drive Sprocket Weldment
19.	VD4-K-05	VDS-48K005 4' Seed Cup Shaft
	VD5-K-05	VDS-60K005 5' Seed Cup Shaft
	VD6-K-05	VDS-72K005 6' Seed Cup Shaft
20.	-----	CSNC506012 Bolt, Hex Head 3/8" - 13 x 3/4" Gr.5
21.	-----	LWASHER-08 Washer, Lock Spring 1/2" Plated
	176-031V	176-031V Cup Drive Housing Assembly Includes 1 Each of Items 15 through 17


FEEDER CUP ASSEMBLY

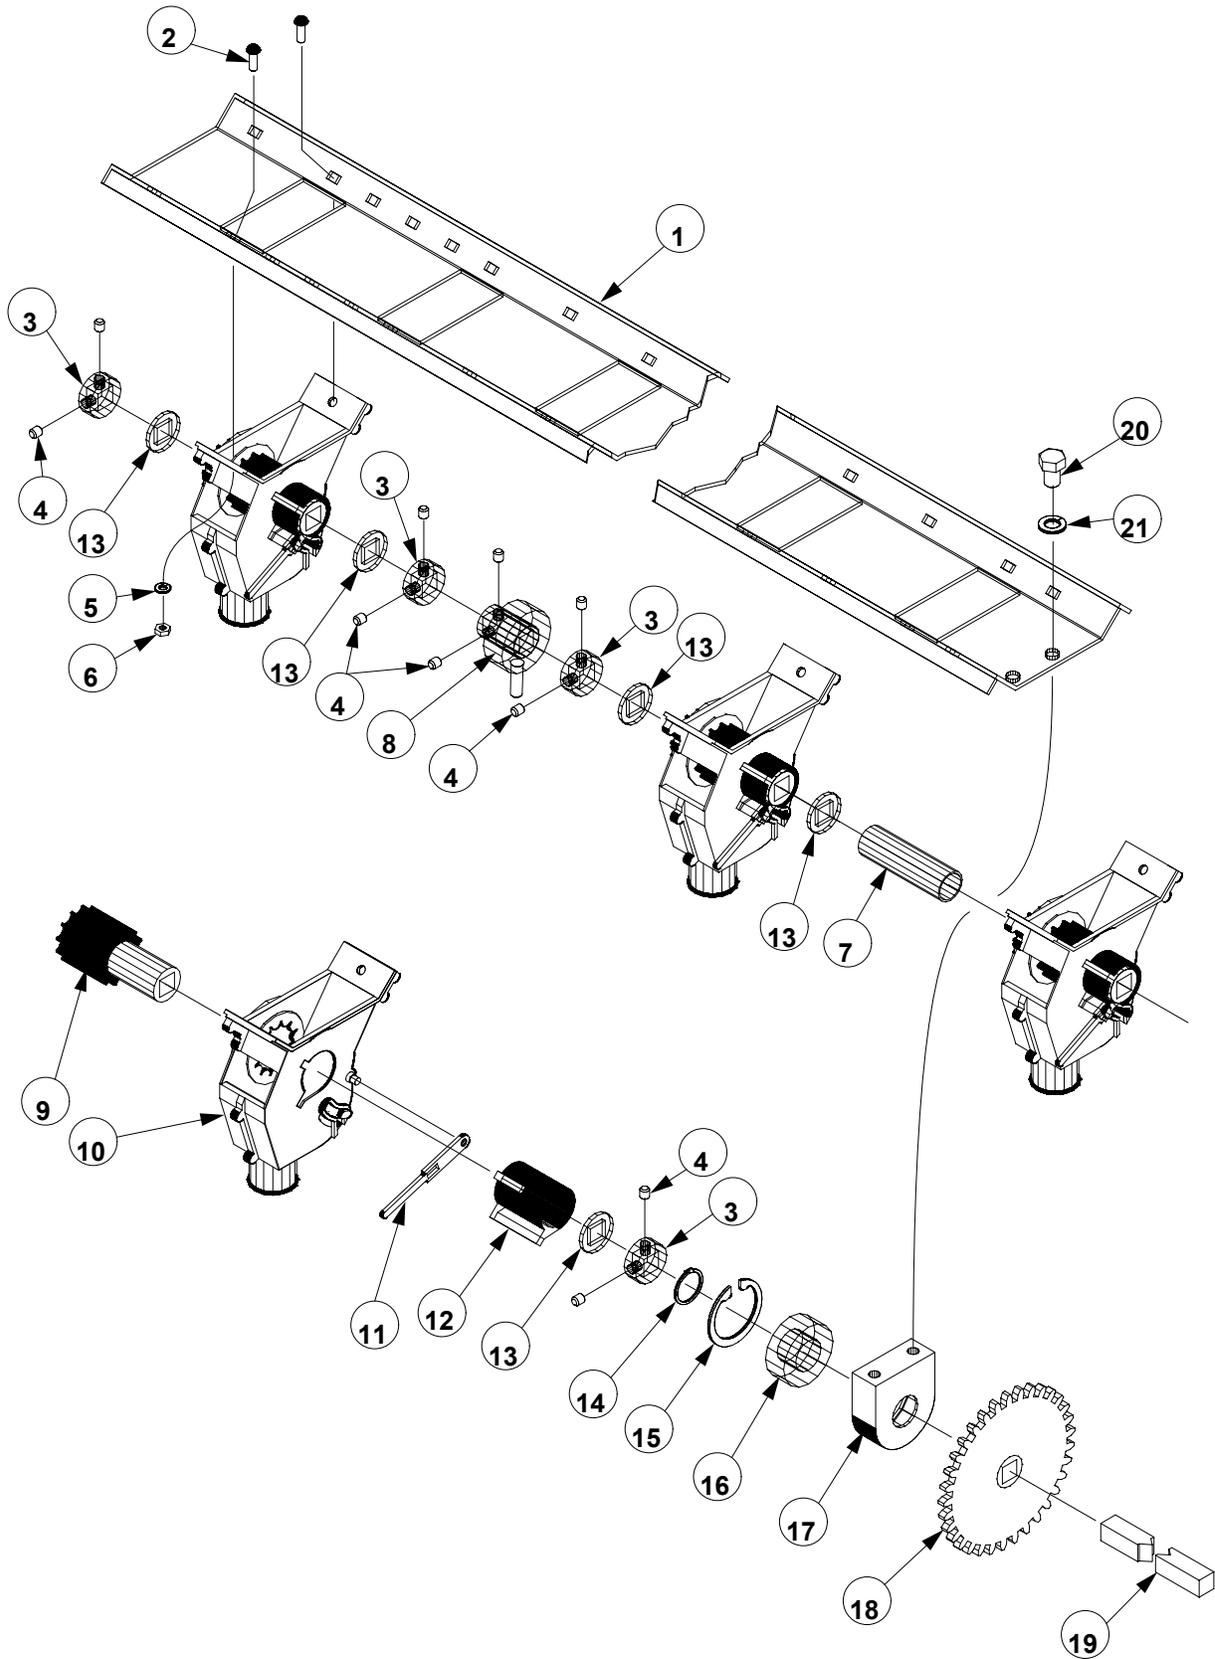

MAIN FRAME & WHEEL LEG ASSEMBLIES

<u>Ref No.</u>	<u>Old Part No.</u>	<u>New Part No.</u>	<u>Description</u>	<u>Qty.</u>
1.	ST4-A	STS-48A000	4' Main Frame	1
	ST5-A	STS-60A000	5' Main Frame	1
	ST6-A	STS-72A000	6' Main Frame	1
2.	VD-J	VDS-00J000	Jack Screw	1
3.	VD-E	VDS-00E000	Wheel Leg	1
4.	VD-D	VDS-00D000	Wheel Shaft	1
5.	VD-F-01	GPN-18CA12	Clevis Pin Cat. I & II	2
6.	VD-J-02	VDS-00J100	Set Screws	2
7.	VD-G-10	VDS-00G010	Sprocket Key	1
8.	VDB-01	GSR-17112T	7" Tension Spring	1
9.	VDB-04	GHB-5X4GSL	Oil Seal	1
10.	VDB-05	GHB-5X4BCN	Bearing Cone	2
11.	VDB-06	GHB-5X4BCP	Bearing Cup	2
12.	VDB-07	GHB-5X45VD	Hub, 5 Studs Complete	1
		GHB-5X4HUB	Hub Body with Bearing Cups (pressed in)	
13.	VDB-08	GSP-16VDCN	Castle Nut	1
14.	VDB-09	GHB-5X4CAP	Hub Cap	1
15.	VDB-10	GWT-801004	20.5 x 8 x 10 Tire with Wheel, 5 on 5	1
16.	VDB-12	WHN-08NFWN	Lug Nuts	5
17.	VDB-14	GSK-12BS13	13 Tooth Sprocket	1
18.		CSNC516088	1" x 5-1/2" Hex Head Gr 5 z/p Bolts	1
19.		CSNC516064	1" x 4" Hex Head Gr 5 z/p Bolts	1
20.		HXNUT-16NC	1" Hex Nuts	2
21.		GPN-04X24C	1/4" x 1-1/2" Cotter Pin	1
22.		GPN-070LYN	7/16" x 1-3/4" Lynch Pins	2


MAIN FRAME & WHEEL LEG ASSEMBLIES

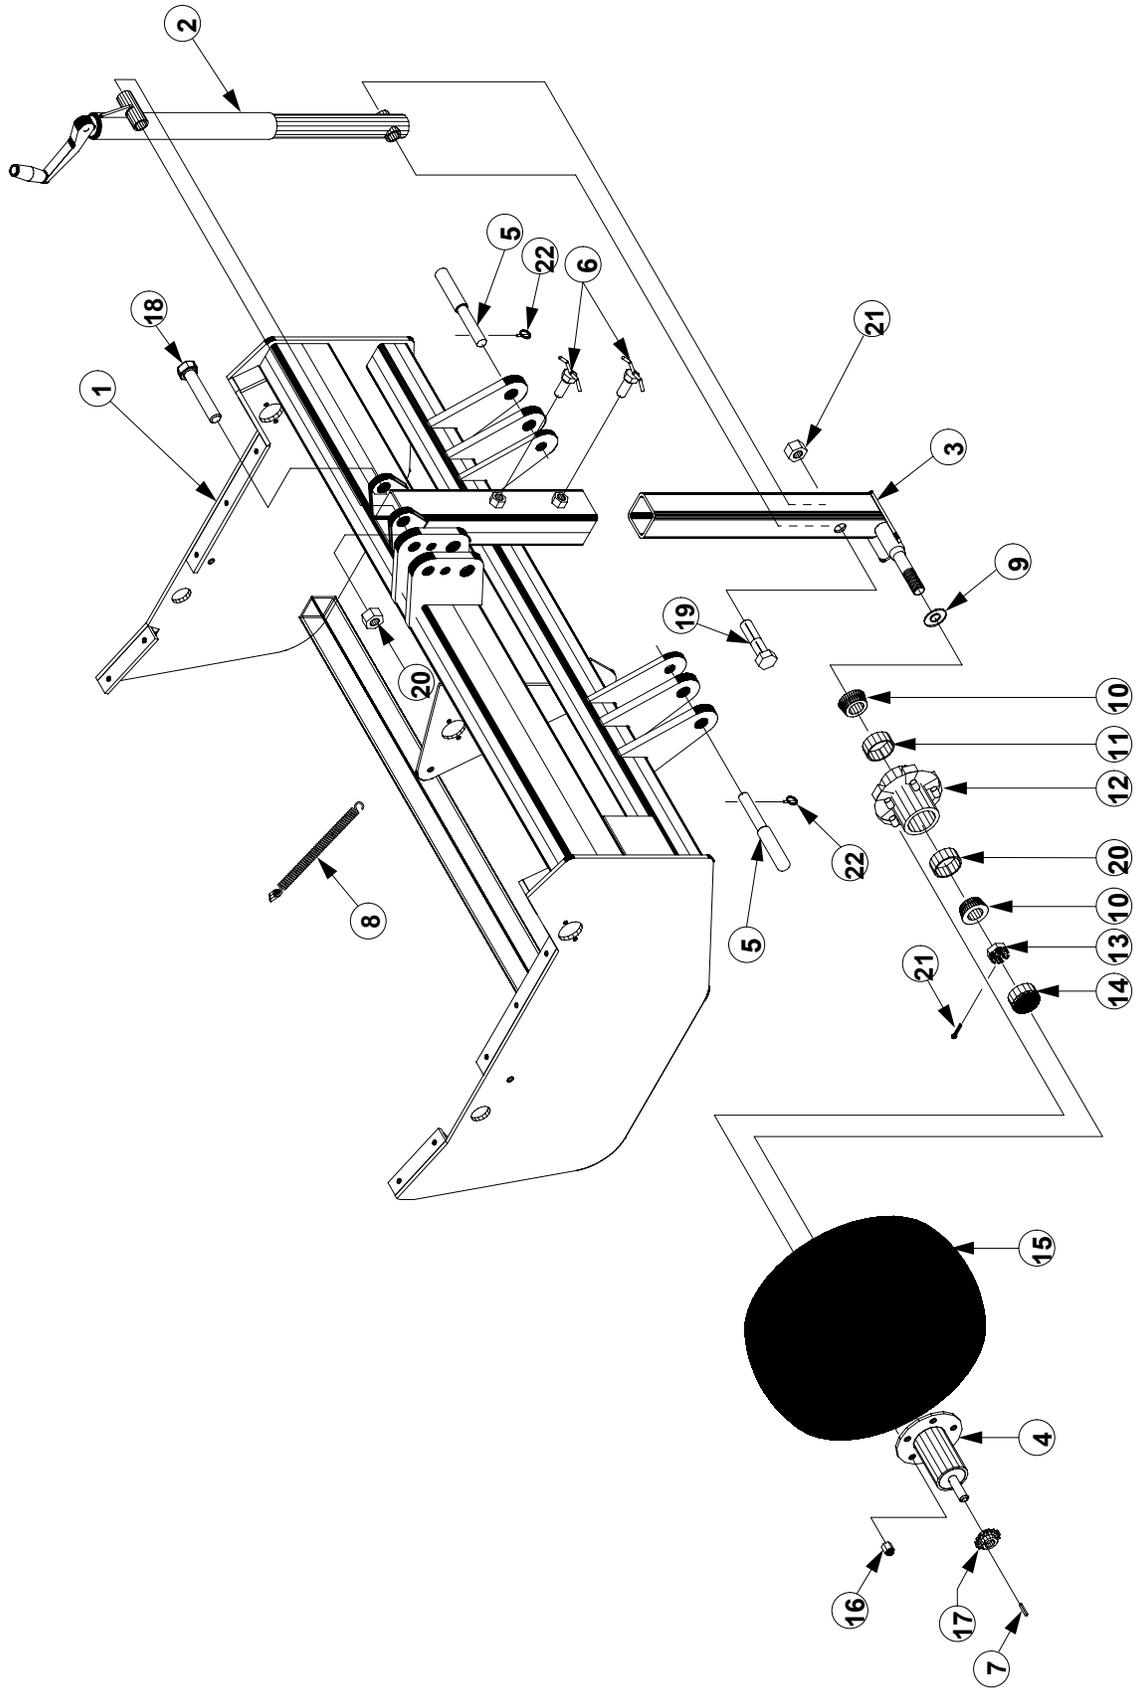

JACK SHAFT, SPROCKET, IDLER & BEARING ASSEMBLIES

<u>Ref No.</u>	<u>Old Part No.</u>	<u>New Part No.</u>	<u>Description</u>	<u>Qty.</u>
1.	VD4-G-06	VDS-48G006	4' Jack Shaft	1
	VD5-G-06	VDS-60G006	5' Jack Shaft	1
	VD6-G-06	VDS-72G006	6' Jack Shaft	1
2.	VD-G-02	VDS-00G002	End Plate Tensioner Arm	1
3.	VD-G-01	VDS-00G001	Center Tensioner Arm & Spring Anchor	1
4.	VD-G-03b	VDS-00G102	Bushing, 13/16" Long	2
5.	VD-G-03	VDS-00G100	Spring Anchor	1
6.	VD-G-04	VDS-00G004	Bushing, 1/2" Long	2
7.	VD-G-05	VDS-00G005	Bushing, 1-1/4" Long	1
8.	VDB-01	GSR-17112T	7" Tension Spring	1
9.	VDB-02	GSR-10040T	2-1/2" Tension Spring	1
10.	VDB-33TS	GSK-12BS33	33 Tooth Sprocket	1
11.	VDB-15I	GSK-08ID15	15 Tooth Idlers	3
12.	VDB-12TS	GSK-12BS12	12 Tooth Sprocket	1
13.	VDB-03	GBR-12BI02	Stamped Flange Bearing with Collar, 3/4"	2
14.		CBNC505016	5/16" x 1" Carriage Square Neck Bolts	4
15.		CSNC508032	1/2" x 2" Hex Head Gr 5 z/p Bolt	1
16.		CSNC508040	1/2" x 2-1/2" Hex Head Gr 5 z/p Bolt	2
17.		CSNC508056	1/2" x 3-1/2" Hex Head Gr 5 z/p Bolt	2
18.		LWASHER-05	5/16" Lock Washers	4
19.		LWASHER-08	1/2" Lock Washers	3
20.		FWASHER-08	1/2" Flat Washer	3
21.		HXNUT-05NC	5/16" Hex Nuts	4
22.		HXNUT-08NC	1/2" Hex Nuts	3
23.		NYNUT-08NC	1/2" Nylon Locknuts	2
24.	VD-G-10	VDS-00G010	Sprocket Key	2
25.		VDS-CH4064	#40 Roller Chain 63 1/2" Long	1
26.		VDS-CH4055	#40 Roller Chain 54 1/2" Long	1
27.			Set Screw, 3/16"	2
28.	118-226S	118-226S	Feeder Cup Bearing Assembly	1
29.		202-002H	19 Tooth Speed Change Sprocket	1
30.		FWASHER-05	5/16" Flat Washer	4


JACK SHAFT, SPROCKET, IDLER & BEARING ASSEMBLIES

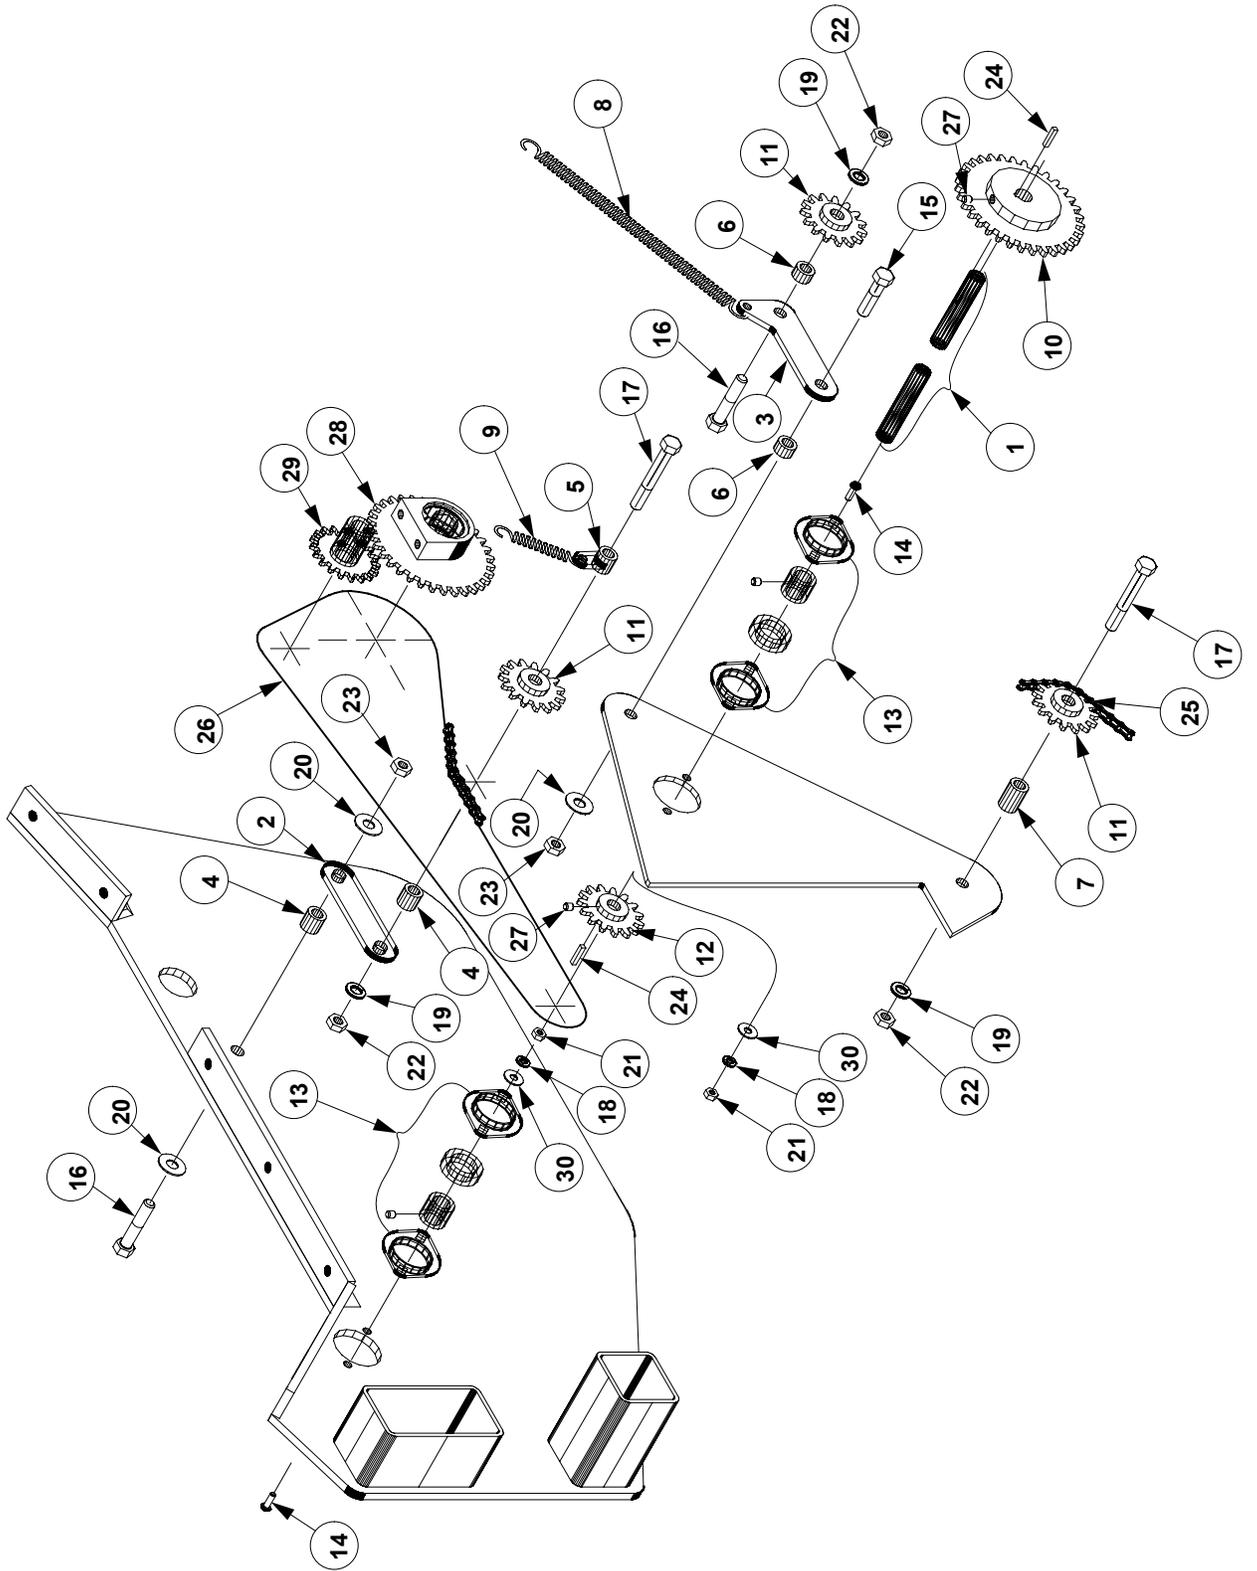

S-TINE & HOSE ASSEMBLIES

<u>Ref No.</u>	<u>Old Part No.</u>	<u>New Part No.</u>	<u>Description</u>
1.	800-009C	800-009C	1-5/8" Hose Clamp #26
2.	816-028C	816-028C	Seed Hose – 33 Ribs
3.	ST-BO-01	GMB-HCLAMP22	1-3/8" Hose Clamp
4.	ST-A-20	GMB-HOSE16	1" Green Hose 16" Long
5.	ST-BO-02	GMB-WGHC32	Green Hose Clamps
6.	-----	CSNC508064	½" x 4" Hex Head Gr. 5 Bolt
7.	-----	LWASHER-08	½" Lockwasher
8.	-----	HXNUT-08NC	½" Hex Nut
9.	ST-BO-03	GST-2CL250	2-1/2" Tool Bar Clamp
10.	ST-BO-04	GST-50125S	½"x1-1/4" S-Tines
11.	ST-BO-05	GST-25150P	S-Tine Points
12.	ST-BO-06	} GST-0624BN	Elliptical Head Bolt M10 x 38 with Nut Assembly
13.	ST-BO-07		

S-TINE & HOSE ASSEMBLIES

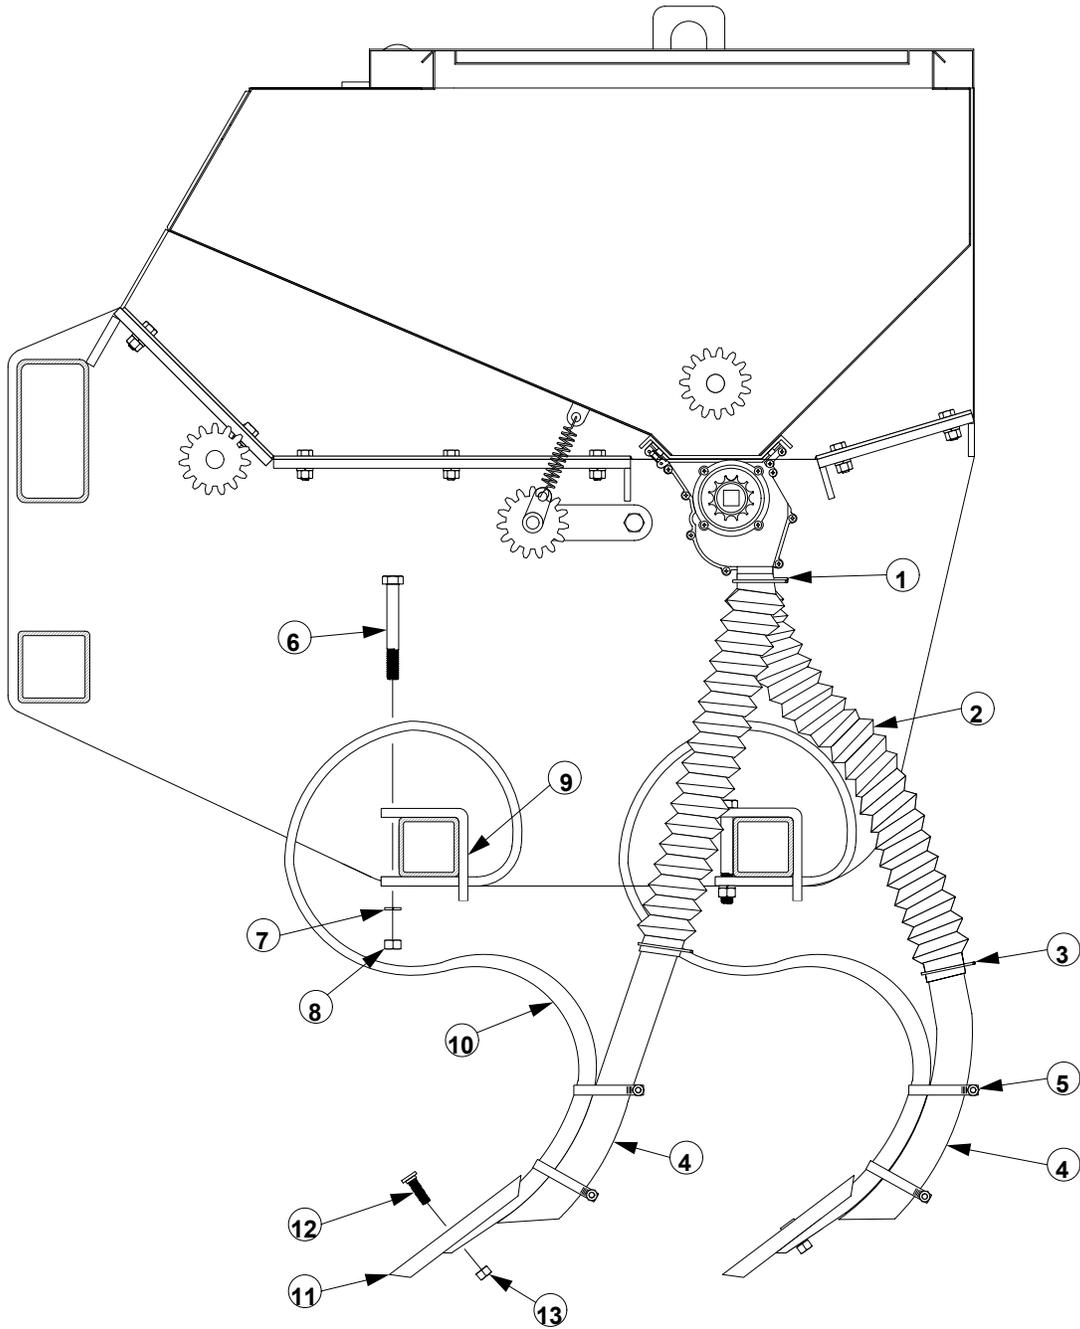

T.G. SCHMEISER CO., INC. ®

Limited Warranty Statement

T. G. Schmeiser Co., Inc. warrants each new Schmeiser® product to be free from defects in material and workmanship. This warranty is applicable only for the normal service life expectancy of the product or components, not to exceed twelve (12) consecutive months from the date of delivery of the new Schmeiser product to the original purchaser.

Genuine T. G. Schmeiser Co., Inc. replacement parts and components will be warranted for 90 days from date of purchase, or the remainder of the original equipment warranty period, whichever is longer.

Under no circumstances will it cover any merchandise or components thereof, which, in the opinion of the company, has been subjected to misuse, unauthorized modifications, alteration, an accident or if repairs have been made with parts other than those obtainable through T. G. Schmeiser Co., Inc.

The Company in no way warrants engines, batteries, cylinders, tires or other trade accessories since these items are warranted separately by their respective manufacturer. Expendable components such as points, shanks, blades, rings, bearings, teeth, and the like are excluded from this warranty.

Our obligation under this warranty shall be limited to repairing or replacing, free of charge to the original purchaser, any part that, in our judgment, shall show evidence of such defect, provided further that such part shall be returned within thirty (30) days from date of failure to T. G. Schmeiser Co., Inc., routed through the dealer and distributor from whom the purchase was made, transportation charges prepaid.

This warranty shall not be interpreted to render T. G. Schmeiser Co., Inc. liable for injury or damages of any kind or nature to person or property. This warranty does not extend to the loss of crops, loss because of delay in harvesting, or any expense or loss incurred for labor, substitute machinery, rental or for any other reason.

Except as set forth above, T. G. Schmeiser Co., Inc. shall have no obligation or liability of any kind on account of any of its equipment and shall not be liable for special or consequential damages. T. G. Schmeiser Co., Inc. makes no other warranty, expressed or implied, and, specifically, T. G. Schmeiser Co., Inc. disclaims any implied warranty or merchantability or fitness for a particular purpose. Some states or provinces do not permit limitations or exclusions of implied warranties or incidental or consequential damages, so the limitations or exclusion in this warranty may not apply.

This warranty is subject to any existing conditions of supply, which may directly affect our ability to obtain materials or manufacture replacement parts.

T. G. Schmeiser Co., Inc. reserves the right to make improvements in design or changes in specifications at any time, without incurring any obligation to owners of units previously sold.

No one is authorized to alter, modify or enlarge this warranty nor the exclusion, limitations and reservations.

**WARRANTY VOID IF NOT REGISTERED
WITHIN 30 DAYS OF PURCHASE DATE**

Notes

A large rectangular box with a black border, containing 18 horizontal gray bars for writing notes. The bars are arranged in a repeating pattern of a gray bar followed by a white bar, starting and ending with a gray bar. This provides a structured space for taking notes.